

iGLO LED Canopy Series - 40W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET





Features

- cULus, DLC premium certificates.
- IP65 internal driver, input voltage 100-277VAC.
- Output constant current lever can be adjusted through output cable with 1-10V.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, Safe to eyes.
- Instant start, NO flickering, NO humming.
- Eco-friendly without mercury.



Applications

Gas Stations, Services Stations, Underground parking lot, Warehouse, Garage, Work floor
Factories and etc.

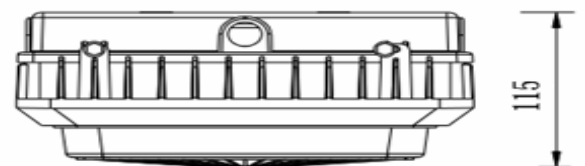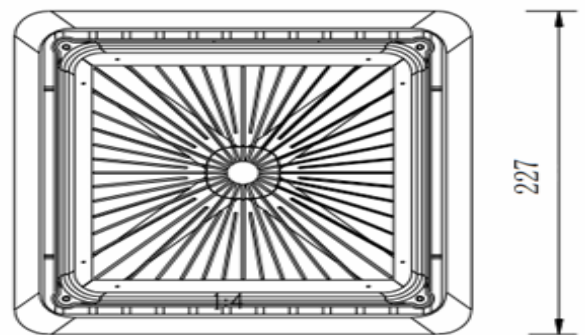

PRODUCT SPECIFICATIONS

iGLO LED Canopy Series:	GL40WCANPYASN4000KUDX GL40WCANPYASN4500KUDX GL40WCANPYASN5000KUDX GL40WCANPYASN5700KUDX
Wattage:	40W
Lumens:	5219 - 5376 lm
CCT:	4000K/4500K/5000K/5700K
Input Voltage:	100-277VAC, 50/60 Hz
Power Factor:	≥0.90
Efficacy:	130 - 133 lm/W
CRI:	>80
THD:	≤15%
Dimensions:	227*227*115 mm
Beam Angle:	160°
Operating Temperature:	-20°C to 45°C
Housing:	Aluminum + PC
Housing Color:	Bronze, White
Cover/Lens Type:	Stripe PC Cover
Optional Accessory:	Motion sensor, Surge Protective Device
Waterproof Rating:	WET (IP65)
Certificates:	cULus, DLC premium
Warranty:	5 Years

	Size	Qty/Carton	Gross Weight
Inner box	280*270*175mm	1 pc	2.3 kg
Outer box	560*370*300mm	4 pcs	10.2 kg

PHOTOMETRIC DATA

